



FLIR KF6

Mountable Thermal Imaging Cameras for Aerial Firefighting Apparatus

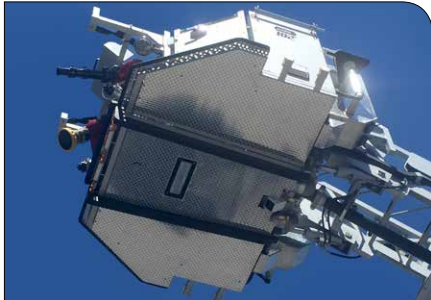

KF6 mounted on underside of platform.

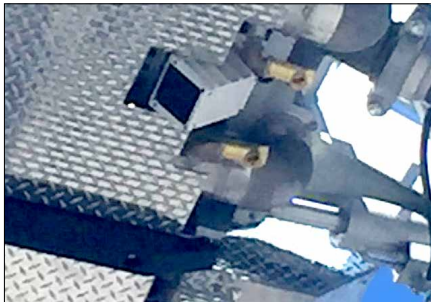

Close up view of KF6 mounted under platform.



KF6 provides high angle thermal perspective.

A New TIC Vantage Point

The FLIR KF6 is the first mountable OEM TIC specifically for aerial apparatus applications. Providing a high-angle thermal view of rooftops, upper stories, and other elevated structures, KF6 can help your team see clearly through smoke and total darkness from an additional strategic perspective for more effective targeting and situational awareness.

Aerial Mounting Flexibility

The KF6 can be easily and securely fixed-mounted under or atop aerial platforms and at the end of straight sticks. A single cable with a MIL-C connector provides 10-32 VDC in and composite video out for simple installation.

Best Resolution Shows You More

Featuring 640 × 480 IR resolution and a 69° FOV, bolstered with onboard FSX™ Flexible Scene Enhancement, the KF6 produces vivid thermal images, providing finer detail and greater visibility for easier orientation and structural identification.

Convenient Monitoring

Pair the KF6 with your preferred video display with one cable and view live, high-angle thermal video on a monitor at the turntable level, on an in-truck LCD, or on a screen right at the platform itself. Or connect to multiple displays via wireless systems.*

CDMQ Ruggedness

FLIR built the KF6 to our Commercially Developed Military Qualified standards. With a rugged housing that meets MIL-STD-810G, an IP67 rating, and extensive IEC testing, KF6 is ready to withstand harsh fire scene operating conditions, well-protected from exposure to heavy smoke and spray.

For more information on FLIR's firefighting thermal imaging cameras, please visit www.flir.com/fire.



FLIR KF6 Specifications

Imaging and optical data	
IR resolution	640 × 480 pixels
Thermal sensitivity/NETD	< 100 mK at f/1.4
Field of view (FOV)	69° × 56°
Focus	Fixed
F number	1.4
Image frequency	30 Hz
Detector data	
Detector type	Focal plane array, uncooled microbolometer
Spectral range	7.5–13.5 μm
Image presentation	
Image mode	TI Basic firefighting mode
Auto range	Yes
Measurement	
Object temperature range	High-gain range: -25 to +150°C (-13 to +302°F) Low-gain range: 0 to +550°C (+32 to +1022°F)
Accuracy	±5°C (±7.2°F) or ±5% in high gain range
Measurement analysis	
Spotmeter	1
Isotherm	Yes
Configuration	
Video standard	NTSC
Mounting	Top or bottom mounted
Temperature unit	F° or C°
Composite video	
Video out	Composite video output, NTSC compatible
Power system	
Power input	10.5–32 V DC (ISO 7637-2)
Start-up time	< 20 seconds
Power consumption	< 5 W average, when supplied with 28 V DC
Connector	
Power and video connector	13-pin MIL-C-38999, D38999/24FB35PN Mating connector: D38999/26FB35SN
Environmental data	
Operating temperature range	-32 to +65°C (-26 to +149°F)
Storage temperature range	-40 to +70°C (-40 to +158°F)
Humidity (operating and storage)	IEC 600 68-2-30, 24 hours, 95% relative humidity, 25–40°C (77–104°F), two cycles
EMC	<ul style="list-style-type: none"> • EN 61000-6-2:2005 (immunity) • EN 61000-6-3:2011 (emission) FCC 47 CFR Part 15 B (emission) • ISO7637-2 Road Vehicles – Electrical Disturbances from conduction and coupling – Part 2: Electrical transient conduction along supply lines only. (Immunity)
Encapsulation	IP 67 (IEC 605 29)
Shock	IEC 600 68-2-27, 25g peak half sine wave
Vibration	IEC 600 68-2-6, 0.15 mm 10 Hz to 58 Hz and 2 g 58 to 500 Hz sinusoidal
Physical data	
Weight	1.2 ± 0.1 kg (2.6 ± 0.2 lb.)
Size (L × W × H)	158 mm × 112 mm × 89 mm (6.2 in. × 4.4 in. × 3.5 in.)
Housing material	Aluminum
Color	White and black

USA
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
TEL: +1 866.477.3687

EUROPE
FLIR Commercial Systems
Luxemburgstraat 2
2321 Meer Belgium
TEL: +32 (0) 3665 5100

ASIA
FLIR Systems Co. Ltd.
Room 1613–16, Tower 2
Grand Central Plaza,
No. 138 Shatin Rural Committee
Road
Shatin, New Territories
Hong Kong
TEL: +852 2792 8955

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18052-852
Brasil
TEL: +55 15 3238 7080

For a complete list of
FLIR offices, please
visit flir.com

NASDAQ: FLIR

© 2016, FLIR Systems, Inc. All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners. Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.