



FLIR T1030sc


High Performance Handheld Thermal Imaging Camera For R&D Applications

The T1030sc is a portable, high-speed, high definition infrared imaging and measurement camera. It's designed for engineers, researchers, and scientists who need the highest resolution and sensitivity possible in a flexible, battery-powered handheld package. Built on 50 years of experience, this camera records full 1024 x 768 resolution images at 30 frames per second. The T1030sc lets you capture lossless HD radiometric imagery at up to 120 Hz which you can view, acquire, analyze, and share in FLIR ResearchIR Max or MathWorks® MATLAB.


Outstanding Image Clarity

An extraordinarily sensitive detector and HD-ready optics provide stunning thermal images and accurate, non-contact temperature measurements


- 1024 x 768 LWIR uncooled HD detector
- Thermal sensitivity (NETD) of < 20 mK, more than twice as sensitive as the industry standard
- FLIR OSX™ Precision HDIR interchangeable lenses provides high-fidelity imagery and accurate temperature measurements at any focal length
- FLIR Vision Processor™ delivers the most detailed, smoothest imagery thanks to MSX®, UltraMax™, and our proprietary adaptive filtering algorithms

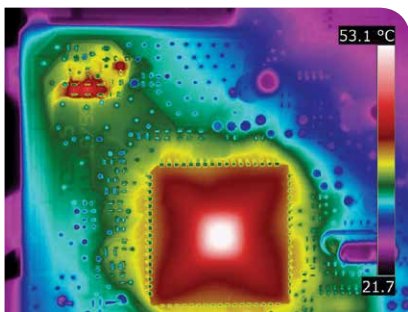

Overheating element on printed circuit board

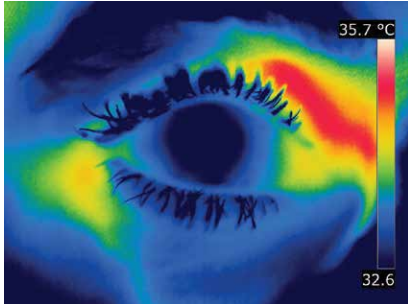

Microscope lens allows for closer examination

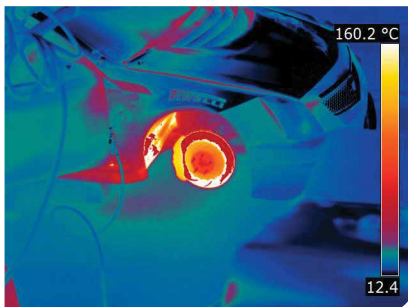

Overheating race car tire and brakes

Portability, Flexibility

Battery-powered, handheld camera goes where you need it, whether you're in the lab or out in the field

- On-camera measurement tools and analytics packed in a portable, battery-powered, handheld, ergonomic design
- Wi-Fi communication simplifies image sharing, remote control and viewing, and quick reporting from the field
- Four programmable buttons, two programmable measurement functions

High-Speed Data, How You Need It


Stream uncompressed data to a PC or capture fully dynamic radiometric video in the camera

- Records real-time radiometric video at 30 Hz to the removable SD card
- Capture lossless HD radiometric imagery at up to 120 Hz or windowed areas at up to 480 Hz via FLIR High-Speed Interface (HSI)
- View, acquire, analyze, and share data with provided FLIR ResearchIR Max software, or using MathWorks® MATLAB (sold separately)
- Compatible with ATLAS SDK for integration of radiometric images and data in your enterprise software program



Specifications

System Overview	FLIR T1030sc
Detector Type	Uncooled Microbolometer
Spectral Range	7.5 - 14 μ m
Resolution	1024 x 768
Detector Pitch	17 μ m
Thermal Sensitivity/ NETD	< 20 mK at +30°C (+86°F)
Electronics/Imaging	
Frame Rate	30 Hz, full window, in camera 120 Hz, full window, with HSI to computer 240 Hz, 1/2 window with HSI 480 Hz, 1/4 window with HSI
Dynamic Range	14-bit
Digital Data Streaming	Real-time radiometric via USB to PC Real-time non-radiometric H.264 via USB or Wi-Fi to PC
In-Camera Radiometric Recording	Real-time radiometric to SD card Real-time non-radiometric H.264 to SD card
Visual Video Recording	H.264 to the SD card
GPS, Compass	Location data, camera direction automatically added to every image
Image File Format	Standard JPEG, including digital photo and measurement data in one file
Measurement	
Object temp. range	-40°C to +150°C (-40°F to +302°F) +100°C to +650°C (+212°F to +1202°F) +300°C to +2000°C (+572°F to +3632°F)
Accuracy	$\pm 1^\circ\text{C}$ ($\pm 1.8^\circ\text{F}$) or $\pm 1\%$ at 25°C for temperatures between 5°C to 150°C. $\pm 2^\circ\text{C}$ ($\pm 3.6^\circ\text{F}$) or $\pm 2\%$ of reading at 25°C for temperatures up to 1200°C
Optics	
Camera f/number	f/1.15 (standard lens)
Available Lenses	81.2 mm (12°), 36 mm (28°), 21.2 mm (45°), 50 μ m Close-up
Spatial Resolution (IFOV)	12° lens: 0.20 mrad; 28° lens: 0.47 mrad; 45° lens: 0.80 mrad
Focus	Auto, continuous auto, manual
Image Presentation	
Display	4.3 in. wide, 800 x 480 pixel capacitive touch screen
Auto-Orientation	Automatic landscape or portrait
Image Analysis	10 spotmeters, 5+5 areas (boxes, circles) with max./min./average
Image Annotations	60 sec. voice (via Bluetooth), text, sketch
Visible Image	Field of View match, adapts to the IR lens
MSX [®]	Embosses visual details onto the full resolution thermal image, providing perspective and ability to read labels
UltraMax [™]	Unique super-resolution process quadruples pixel count, up to 3.1 MP
Additional Information	
Operating Temp. Range	-40°C to +150°C (-40°F to +302°F)
Storage Temp. Range	-40°C to +70°C (-40 to 158°F)
Encapsulation	IP 54 (IEC 60529)
Bump/Vibration	25 g (IEC 60068-2-29) / 2 g (IEC 60068-2-6)
External Power Operation	AC adapter, 90-260 VAC input, 50/60 Hz or 12 V output from a vehicle (cable with standard plug, optional)
Battery	Rechargeable Li-ion polymer battery, > 2.5 hours at 25°C (+68°F)
Weight	1.9 kg (4.3 lb.) to 2.1 kg (4.6 lb.), depending upon lens model
Size (L x W x H)	167.2 mm x 204.5 mm x 188.3 mm (6.6 in. x 8.0 in. x 7.4 in.)
Tripod Mounting	UNC 1/4"-20
System Includes:	
Infrared camera with lens, Battery (2 each), Battery charger, HDMI-HDMI cable, Hard transport case, Large eyecup, Lens cap, Bluetooth headset, SD card, Neck strap, USB cable, Standard A to Mini-B, HSI box (SC models only), Calibration certificate, ResearchIR Max, FLIR Tools download card, User documentation on CD-ROM, Printed documentation	

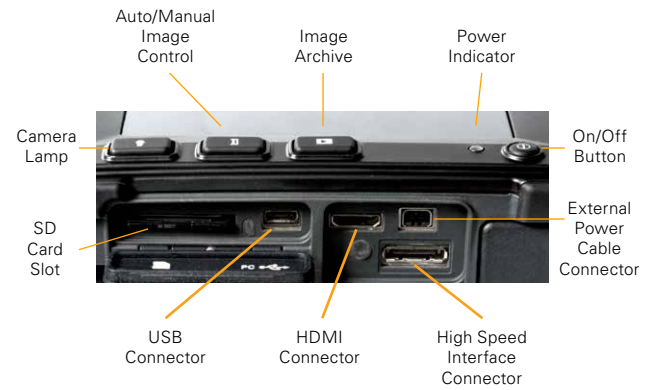

Covers parts and labor for two years, batteries for five years, and detector for ten years.

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063
USA
PH: +1 603.324.7600

EUROPE
FLIR Systems
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

PORTLAND
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 503.498.3547

SWEDEN
FLIR Systems AB
Antennvägen 6,
PO Box 7376
SE-187 66 Täby
Sweden
PH: +46 (0)8 753 25 00

CANADA
FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5L6
Canada
PH: +1 800.613.0507

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella, 320
Sorocaba, SP 18052-852
Brasil
TEL: +55 15 3238 7080

UK
FLIR Systems UK
2 Kings Hill Avenue
Kings Hill
West Malling - Kent
ME19 4AQ
United Kingdom
PH: +44 (0)1732 220 011

HONG KONG
FLIR Systems Co., Ltd
Rm 1613-16, Tower II
Grand Central Plaza
138 Shatin Rural
Committee Road Shatin,
New Territories
Hong Kong
TEL: +852 2792 8955

www.flir.com/research
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Specifications are subject to change without notice.
For the most up-to-date specs, visit our website: www.flir.com/T1030sc. ©2015 FLIR Systems, Inc. All other brand and product names are trademarks of FLIR Systems, Incorporated. Imagery used for illustration purposes only. 11/2015